



Securing Valuables

Storage Security



SHIELD products and merchandise after hours



PROTECT equipment and unique items from theft



SECURE valuable, confidential, and important items


Secure Storage Shutters

OPERATION

- Spring assist manual or powered operation options
- Control effortlessly by switch, remote, Wi-Fi, or app
- Smooth operation with low maintenance design
- Safe, long-lasting performance with the latest in motorized technologies
- The curtain rolls into a compact coil allowing a minimal size and sleek box housing design


MATERIALS

- Minimal size, high-tech roll-formed aluminum box housing
- A variety of curtain styles and colors for that perfect look
- Gorgeous selection of low maintenance materials, with next-generation powder coated finishes
- Commercial-grade aluminum - Environmentally friendly material with positive effects during production and long term operation
- Clamp-on or screw-on options for a clean install and lasting durability
- High strength and durability means your storage is secure and protected at all times

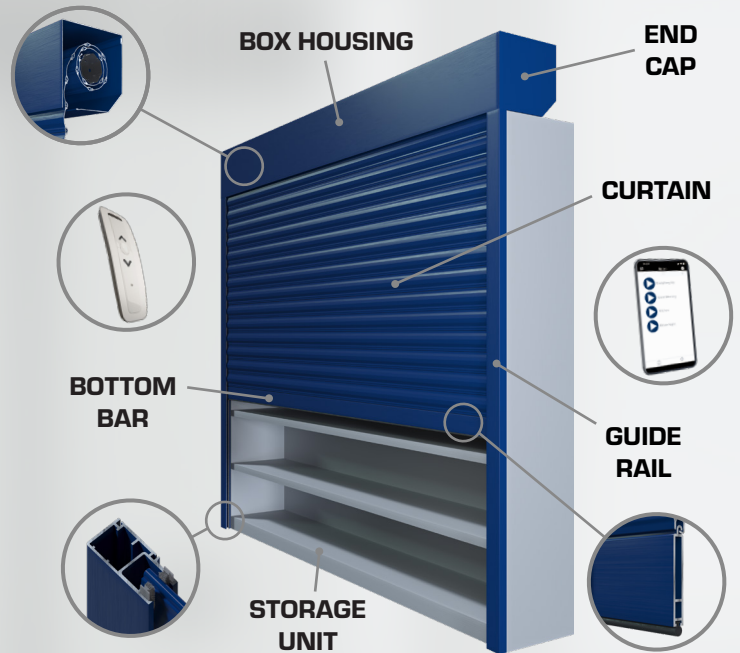


FRAME & CURTAIN COLOR OPTIONS

- Not all series are available in all colors; contact your dealer for options
- Additional charge for dark bronze, black, and custom colors

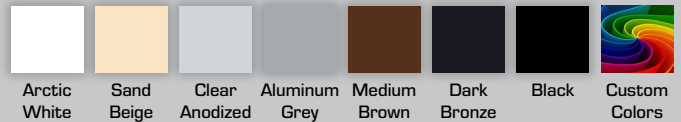

BOTTOM BAR OPTIONS

- 57 mm (2.25 in) or 60 mm (2.36 in) Standard Bottom Bars
- Optimum durability and provides reliable security



OFFICE



HEALTHCARE



MOBILE SHELVE



LAW ENFORCEMENT



MILITARY




PHARMACY



ATHLETICS



AUTOMOTIVE

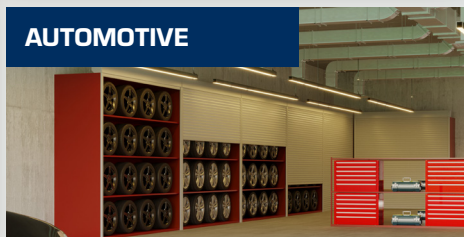


MUSEUM



SHUTTER CURTAIN STYLES AND SIZING

Pentagon TambourGuard curtain styles are finished in industry-leading coatings and provide options for visibility. Our engineered slats provide enhanced security and add to the visual appeal of your facility.

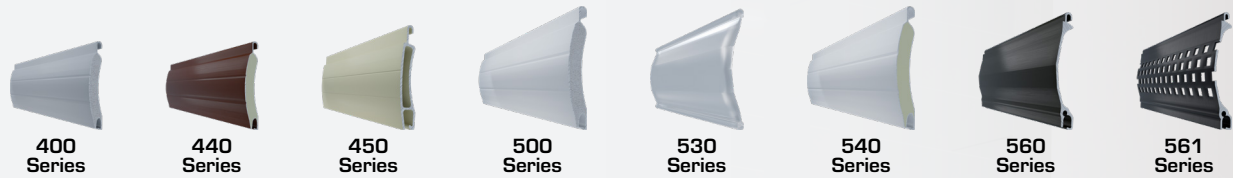

SOLID CURTAIN							
	Description	400*	440*	450	500	540	560
	The solid curtain is available in the 400*, 440*, 450, 500, and 560 series. These series provide a secure barrier for storage.	Roll-formed aluminum with regular density foam filling	Roll-formed aluminum with ultra hard resin core	Double wall extruded aluminum	Roll-formed aluminum with regular density foam filling	Roll-formed aluminum with ultra hard resin core	Single wall extruded aluminum
	* Available with light slots						

PERFORATED CURTAIN			561
	Description		
	TambourGuard is available with a perforated curtain in the 561 series. The small perforation option is designed to allow light transfer through the shutter curtain and optimal airflow. This perforated curtain option provides an unobstructed view through the shutter:		Single wall extruded aluminum with small perforations

PATTERNED CURTAIN			530
	Description		
	The patterned curtain is available using the 530 series in TambourGuard. Clear anodized connector rods are used between each slat, adding valuable strength and visual appeal to the curtain. The curtain pattern available in TambourGuard is the clear pattern.		Clear polycarbonate / aluminum with curved design

BOTTOM BAR SIZING		STD Bottom Bar
Description		
The TambourGuard system is compatible with the Standard Bottom Bar (two sizes) and the Heavy Duty Bottom Bar (one size). The Standard Bottom Bar is low profile and secure. The Heavy Duty Bottom Bar is extremely strong and durable.		2.25 in (57 mm) 2.36 in (60 mm)

GUIDE RAIL SIZING					
Description	53 mm	64 mm	66 mm	83 mm	83 mm - AnchorLoc
5 guide rail sizes are compatible with TambourGuard. AnchorLoc secures the curtain to each guide rail.	2 in (53 mm)	2.5 in (64 mm)	2.6 in (66 mm)	3.25 in (83 mm)	3.25 in (83 mm)

SHUTTER AND CURTAIN SIZING					
400	53 mm, 66 mm	STD 2.25 in (57 mm), HD 3 in (75 mm)	Up to 168 in (4267 mm)	Up to 228 in (5791 mm)	171 sq. ft (15.9 sq. m)
440	53 mm, 66 mm	STD 2.25 in (57 mm), HD 3 in (75 mm)	Up to 168 in (4267 mm)	Up to 228 in (5791 mm)	171 sq. ft (15.9 sq. m)
450	53 mm, 66 mm, 83 mm - AnchorLoc	STD 2.25 in (57 mm), HD 3 in (75 mm)	Up to 168 in (4267 mm)	Up to 228 in (5791 mm)	265 sq. ft (24.6 sq. m)
500	64 mm, 83 mm	STD 2.36 in (60 mm), HD 3 in (75 mm)	Up to 168 in (4267 mm)	Up to 228 in (5791 mm)	246 sq. ft (22.9 sq. m)
530	64 mm, 83 mm, 83 mm - AnchorLoc	STD 2.36 in (60 mm), HD 3 in (75 mm)	Up to 192 in (4876 mm)	Up to 228 in (5791 mm)	208 sq. ft (19.4 sq. m)
540	64 mm, 83 mm	STD 2.36 in (60 mm), HD 3 in (75 mm)	Up to 168 in (4267 mm)	Up to 228 in (5791 mm)	246 sq. ft (22.9 sq. m)
560	64 mm, 83 mm, 83 mm - AnchorLoc	STD 2.36 in (60 mm), HD 3 in (75 mm)	Up to 192 in (4876 mm)	Up to 228 in (5791 mm)	284 sq. ft (26.4 sq. m)
561	64 mm, 83 mm, 83 mm - AnchorLoc	STD 2.36 in (60 mm), HD 3 in (75 mm)	Up to 192 in (4876 mm)	Up to 228 in (5791 mm)	284 sq. ft (26.4 sq. m)
562	64 mm, 83 mm, 83 mm - AnchorLoc	STD 2.36 in (60 mm), HD 3 in (75 mm)	Up to 192 in (4876 mm)	Up to 228 in (5791 mm)	284 sq. ft (26.4 sq. m)